


ID READER - Enrollment series

Easyness through convenience

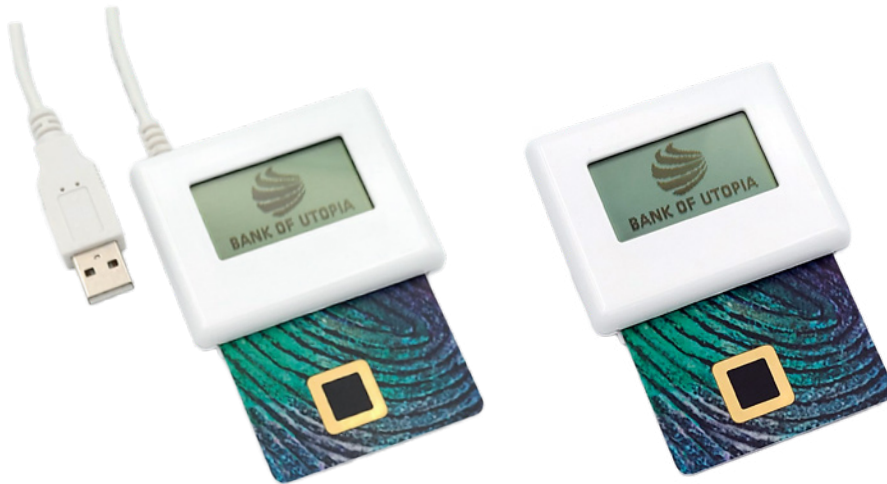

- Easy enrollment
- Self-comprehensive
- Large screen
- Customizable process
- Customizable printing

ID READER - Enrollment series

Features

General

- Dimensions 65 x 55 x 10 mm
- Temperature In operation: 0°C to +50°C
Storage: -40°C to +80°C
- Weight 30g
- Screen size 128*64 pixels
- Enrollment process customizable (FW)
- Serigraphy both sides customizable

ID READER 212

- Power Internal battery
- Weight 30g
- Autonomy 60min.

ID READER 221 (enrolment - default)

- Power USB
- Weight 65g
- Autonomy unlimited.

ID READER 221 (CCID mode)

- Host O/S Windows, MacOS, LINUX, Android
- Supported protols ISO 7816 - T=0 and T=1
5V, 3V, 1.8V, ISO 7816 Class A/B/C
- Speed Baudrate up to 230kbps
Clock: Up to 10 Mhz
- Communication CCID compliant (Windows, MacOS, Linux)
Custom CCID library (Android)
PC/SC 2.01 compliant (Windows, MacOS, Linux)
PC/SC .net wrapper (Windows)
- Firmware Field upgradable

Product Range

| | ID READER 212 | ID READER 221 |
|-----------------|---------------|---------------|
| Contact | ✓ | ✓ |
| Battery-powered | ✓ | |
| USB powered | | ✓ |

ELYCTIS sas

91 rue Benjamin Franklin – 84120 Pertuis – FRANCE

Tel. +33 6 27 71 37 68

contact@elyctis.com - www.elyctis.com

Siret 508 994 449 00033 – VAT number FR47 508 994 449

ELYCTIS HK Limited

D2 2/F Mai Wah Ind. Bldg. – 1-7 Wah Sing St. Kwai Chung NT –

HONG KONG

Tel. +852 91 08 78 58

contact_hongkong@elyctis.com